Projector

8953H
User's Manual (concise)

Thank you for purchasing this projector.

ENGLISH

⚠WARNING

►Before using this product, be sure to read all manuals for this product. See "Using the CD manual" (🕮*13*) to read the manuals in the CD. After reading them, store them in a safe place for future reference.

Contents

	🕮		🕮
Contents of package	1	Displaying the picture	8
Arrangement	2	Turning off the power	8
Connecting your devices	3	Lamp	9
Using a USB storage	4	Air filter	11
Using an SD card	4	Internal clock battery	12
Connecting power supply	5	Using the CD manual	13
Turning on the power	5	Regulatory notices	14
Adjusting the projector's elevator	6	Specifications	15
Remote control	6	Warranty and after-service	16

Contents of package

Your projector should come with the items shown below. Check that all the items are included. Require of your dealer immediately if any items are missing.

(1) Remote control with two AA batteries
(2) Power cord
(3) RGB cable
(4) Lens cover and Rivet and Strap
(5) User's manuals (Book x1, CD x1)
(6) Security label
(7) Slot cover lock
(8) Application CD

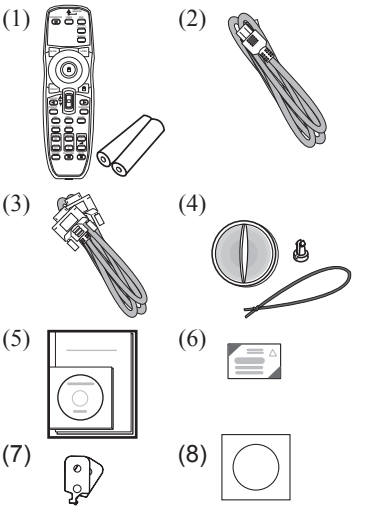

NOTE

• To use the wireless network function, the designated wireless network card that is sold as an optional is required. (🕮*15*)

⚠CAUTION

►Keep the original packing materials for future reshipment. Be sure to use the original packing materials when moving the projector. Use special caution for the lens.

Arrangement

Please arrange the projector and the screen.
Install the projector in a stable, cool and airy place, keeping a space of 30 cm or more between the sides of the projector and other objects such as walls. Avoid the projector from a hot, humid, dusty, or smoky place.
Refer to the illustrations and tables below to determine screen size and projection distance.
The values shown in the table are calculated for a full size screen: 1024x768
(a) Screen size (diagonal)
(b) Projection distance (±10%)
(c) Screen height (±10%), when the vertical lens shift is set full upward.

On a horizontal surface



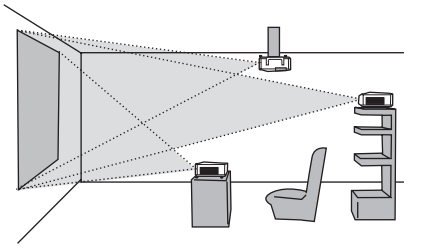

Suspended from the ceiling

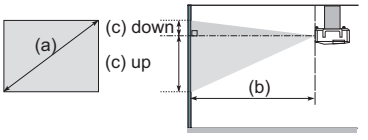

• Consult with your dealer before a special installation such as suspending from a ceiling.

(a) Screen size [inch (m)]	4 : 3 screen						16 : 9 screen					
	(b) Projection distance [m (inch)]		(c) Screen height [cm (inch)]				(b) Projection distance [m (inch)]		(c) Screen height [cm (inch)]			
	min.		max.		down		up		min.		max.		down		up	
30 (0.8)	0.9	(35)	1.1	(42)	5	(2)	41	(16)	1.0	(38)	1.2	(46)	-1	(0)	39	(15)
40 (1.0)	1.2	(47)	1.4	(57)	6	(2)	55	(22)	1.3	(51)	1.6	(62)	-2	(-1)	51	(20)
60 (1.5)	1.8	(71)	2.2	(86)	9	(4)	82	(32)	2.0	(78)	2.4	(94)	-2	(-1)	77	(30)
70 (1.8)	2.1	(83)	2.6	(100)	11	(4)	96	(38)	2.3	(91)	2.8	(110)	-3	(-1)	90	(35)
80 (2.0)	2.4	(96)	2.9	(115)	12	(5)	110	(43)	2.6	(104)	3.2	(126)	-3	(-1)	103	(41)
90 (2.3)	2.7	(108)	3.3	(130)	14	(5)	123	(49)	3.0	(117)	3.6	(141)	-4	(-1)	116	(46)
100 (2.5)	3.0	(120)	3.7	(144)	15	(6)	137	(54)	3.3	(131)	4.0	(157)	-4	(-2)	129	(51)
120 (3.0)	3.7	(144)	4.4	(174)	18	(7)	165	(65)	4.0	(157)	4.8	(189)	-5	(-2)	154	(61)
150 (3.8)	4.6	(181)	5.5	(217)	23	(9)	206	(81)	5.0	(197)	6.0	(237)	-6	(-2)	193	(76)
200 (5.1)	6.1	(241)	7.4	(291)	30	(12)	274	(108)	6.7	(263)	8.0	(317)	-8	(-3)	257	(101)
250 (6.4)	7.7	(302)	9.2	(364)	38	(15)	343	(135)	8.4	(329)	10.1	(396)	-10	(-4)	322	(127)
300 (7.6)	9.2	(363)	11.1	(437)	46	(18)	411	(162)	10.0	(395)	12.1	(476)	-12	(-5)	386	(152)
350 (8.9)	10.8	(424)	13.0	(510)	53	(21)	480	(189)	11.7	(462)	14.1	(556)	-15	(-6)	450	(177)

⚠WARNING

►Install the projector in a stable horizontal position.
►Place the projector in a cool place, and ensure that there is sufficient ventilation.
►Do not place the projector any place where it may get wet.

⚠CAUTION

►Avoid placing the projector in smoky, humid or dusty place.
►Position the projector to prevent light from directly hitting the projector's remote sensor.

Connecting your devices

Before connecting devices, please read the manuals for all the devices that you want to connect with this projector, to make sure that the connection is proper and prepare the connectors needed. And connect them properly according to the manuals.

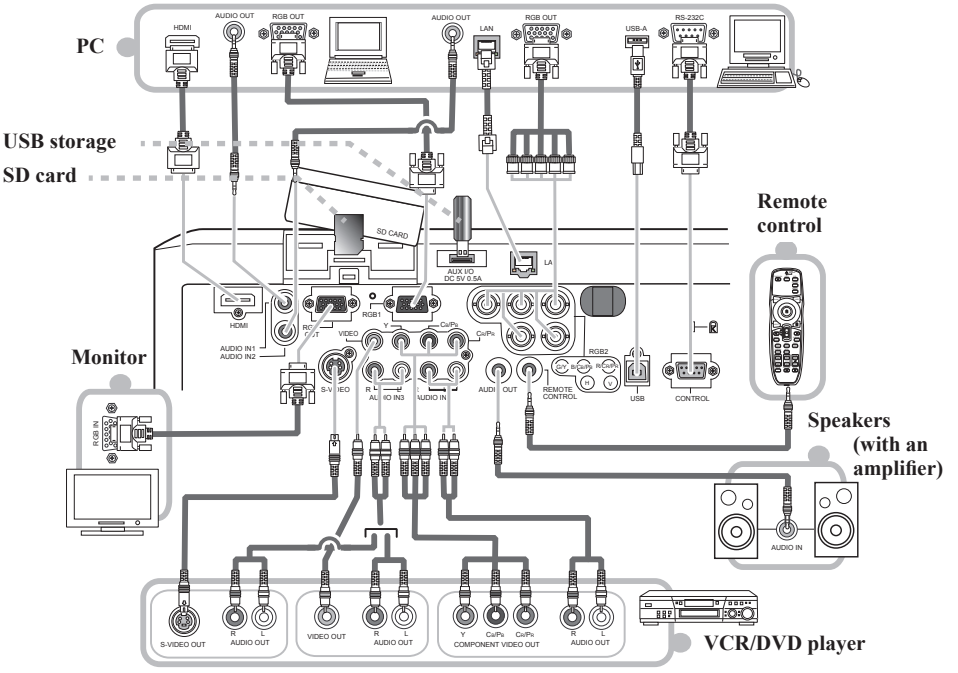

⚠WARNING

►Do not disassemble or modify the projector and accessories.
►Be careful not to damage the cables, and do not use damaged cables.

⚠CAUTION

►Turn off all devices and unplug their power cords prior to connecting them to projector.
►Use appropriate accessory or designated cables. Ask your dealer about non-accessory cables which may be required a specific length or a ferrite core by the regulations. For cables with a core only at one end, connect the end with the core to the projector.
►Make sure that devices are connected to the correct ports.

Using a USB storage

In order to view images stored in a USB storage, such as a USB memory, insert the device into the AUX I/O port. Before removing the USB storage, be sure to perform the REMOVE MEDIA procedure using the PC-LESS PRESENTATION menu under the MIU menu.

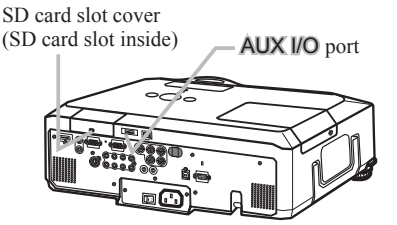

Using an SD card

In order to view images stored in an SD storage, such as an SD memory card, insert the device into the SD card slot. Or, in order to use the wireless network function, load the internal clock battery (📖*12*) and insert the designated wireless network card that is sold as an option (📖*15*) into the slot.

Inserting the SD card

1. Make sure that the power code is not plugged into the projector for the wireless network card only.
2. Remove the SD card slot cover. After slowly insert the SD card completely into the SD card slot, replace the SD card slot cover.



Using the slot cover lock for security

Using the enclosed slot cover lock can prevent the SD card slot cover from being opened.

1. Open the two plates of the slot cover lock to put the tips of two plates together, and then insert the tips to the lock hole of the SD card slot cover.
2. Put the body of the two plates together. Then, hook a padlock or combination lock to the hole of the slot cover lock.



Removing the SD card

1. Perform the REMOVE MEDIA procedure using the PC-LESS PRESENTATION menu under the MIU menu for SD storage card only.
2. Turn the projector off and unplug the power code from the projector for the wireless network card only.
3. Remove the SD card slot cover. After taking the SD card away, replace the SD card slot cover.

⚠CAUTION

►Do not touch the SD card while being accessed.

►To use the wireless network function, the designated wireless network card that is sold as an option is required.

• The wireless network card is not permitted to be sold or used in some countries and regions. Use the card only in the country or region where you buy it. For more information, ask your local dealer.

• When using the wireless network card, to comply with FCC RF exposure compliance requirements, the antenna used for this transmitter must be installed to provide a separation distance of at least 20 cm from all persons and must not be co-located or operating in conjunction with any other antenna or transmitter.

• Before using the projector with a wired LAN, remove the wireless network card.

Connecting power supply

1. Connect the connector of the power cord to the AC IN (AC inlet) of the projector.
2. Firmly plug the power cord's plug into the outlet.



⚠WARNING

►Please use extra caution when connecting the power cord, as incorrect or faulty connections may result in fire and/or electrical shock.

• Only use the power cord that came with the projector. If it is damaged, consult your dealer to get a new one.

• Only plug the power cord into an outlet whose voltage is matched to the power cord. The power outlet should be close to the projector and easily accessible. Remove the power cord for complete separation.

• Never modify the power cord.

Turning on the power

1. Make sure that the power cord is firmly and correctly connected to the projector and the outlet.
2. Remove the lens cover, and set the power switch to the ON position (marked " I ").
   The POWER indicator will light up in steady orange. Then wait several seconds because the buttons may not function for these several seconds.
3. Press the STANDBY/ON button on the projector or the remote control.

The projection lamp will light up and the POWER indicator will begin blinking in green. When the power is completely on, the indicator will stop blinking and light in steady green.

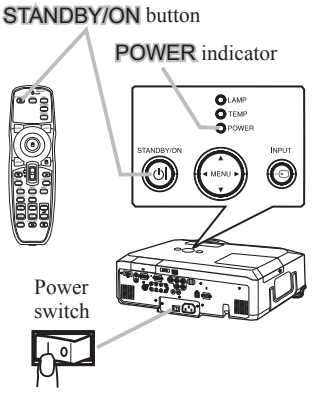

⚠WARNING

►A strong light is emitted when the projector's power is on. Do not look into the lens of the projector or look inside of the projector through any of the projector's openings.

NOTE

• When the **AUTO ON** in the OPTION menu is set to the TURN ON, and the power was turned off by the power switch last time, turning the power switch on makes the projection lamp light on without pushing the STANDBY/ON button. For more information, please see the "Operating Guide" in the CD.

Adjusting the projector's elevator

Use the elevator feet to place the projector horizontally. Using the feet can also tilt the projector in order to project at a suitable angle to the screen, elevating the front side of the projector within 10 degrees.



This projector has 2 elevator feet and 2 elevator knobs. An elevator foot is adjustable while pulling up the elevator knob on the same side as it.



1. To loose an elevator foot, pull up the elevator knob on the same side as it.
2. Position the front side of the projector to the desired height.
3. Release the elevator knobs in order to lock the elevator feet.
4. To finely adjust, twist the foot.



⚠WARNING

►Do not handle the elevator knobs without holding the projector, since the projector may drop down.

►Do not tilt the projector other than elevating its front within 10 degrees using the adjuster feet. A tilt of the projector exceeding the restriction could cause malfunction or shortening the lifetime of consumables, or the projector itself.

Remote control

Laser pointer

The laser beam is emitted and the LASER INDICATOR lights while the LASER button is pressed.

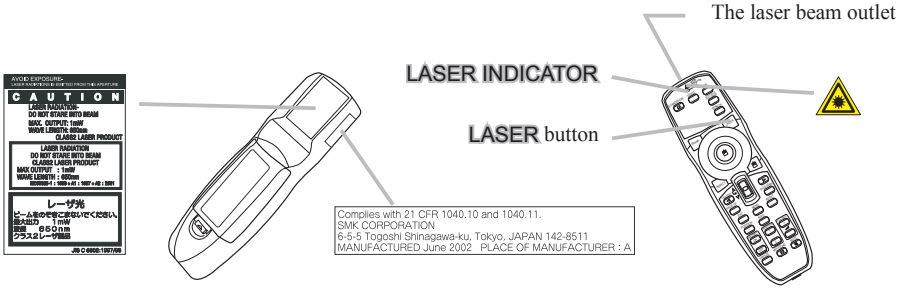
The laser beam outlet
LASER INDICATOR
LASER button
CAUTION
Complies with 21 CFR 1040.10 and 1040.11.
SMK CORPORATION
6-5-5 Togoshi Shinagawa-ku, Tokyo, JAPAN 142-8511
MANUFACTURED June 2002 PLACE OF MANUFACTURER : A

⚠WARNING

►Never hit an eye with the laser beam, and use the laser pointer except to serve as a pointer to a screen. The laser beam can cause vision problems, and also may cause radiation exposure.

Putting batteries

Please load the batteries before using the remote control.

1. Slide back and remove the battery cover.
2. Put the two AA batteries
   into the holder, according to the polarity markings (+) and (-) on the holder.
3. Put the battery cover back to its former state.



⚠WARNING

►Always handle the batteries with care and use them only as directed. Improper use may result in battery explosion, cracking or leakage, which could result in fire, injury and/or pollution of the surrounding environment.

• Be sure to use only the batteries specified. Do not use batteries of different types at the same time. Do not mix a new battery with used one.
• Make sure the plus and minus terminals are correctly aligned when loading a battery.
• Keep a battery away from children and pets.
• Do not recharge, short circuit, solder or disassemble a battery.
• Do not place a battery in a fire or water. Keep batteries in a dark, cool and dry place.
• If you observe battery leakage, wipe out the leakage and then replace a battery. If the leakage adheres to your body or clothes, rinse well with water immediately.
• Obey the local laws on disposing the battery.

Buttons

(1) STANDBY/ON button
(2) VIDEO button (3) RGB button
(4) MY SOURCE/DOC.CAMERA button
(5) SEARCH button (6) BLANK button
(7) LASER button (8) ASPECT button
(9) Lever switch : acting 3 functions as below.
Cursor button ▲ : to slide toward the side marked ▲.
Cursor button ▼ : to slide toward the side marked ▼.
ENTER button : to push down the center point.
(10) Cursor button ◄ (11) Cursor button ►
(12) PAGE UP button (13) PAGE DOWN button
(14) ESC button (15) MENU button
(16) RESET button (17) POSITION button
(18) AUTO button
(19) MAGNIFY ON/OFF button
(20) MY BUTTON 1 button (21) MY BUTTON 2 button
(22) VOLUME +/- button (23) FREEZE button
(24) KEYSTONE button (25) MUTE button

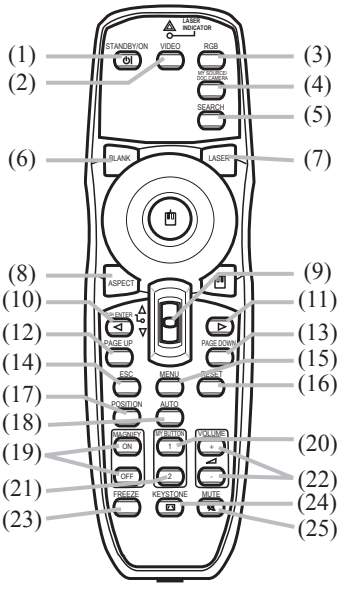

Displaying the picture



1. Make sure that the signal source is sending the signal to the projector.
2. Use the VOLUME +/- buttons to adjust the volume. To have the projector silent, press the MUTE button on the remote control.
3. Press the INPUT button on the projector.
   Each time you press the button, the projector switches its input port in turn.
4. Press the ASPECT button on the remote control. Each time you press the button, the projector switches the mode for aspect ratio in turn.
5. Use the zoom ring to adjust the screen size.
6. Use the focus ring to focus the picture.
7. Use the vertical lens shift dial to shift the picture upward or downward. It is recommended to adjust the picture upward.
8. Use the horizontal lens shift dial to shift the picture left or right.



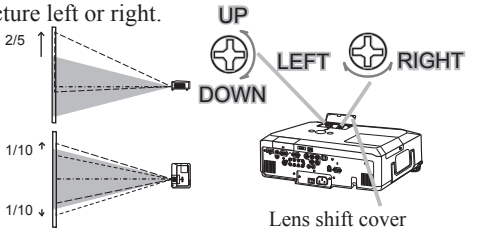

Turning off the power

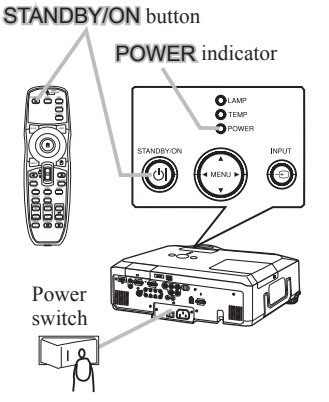

1. Press the STANDBY/ON button on the projector or the remote control.
   The message "Power off?" will appear on the screen for about 5 seconds.
2. Press the STANDBY/ON button on the projector or the remote control again while the message appears.
   The projector lamp will go off, and the POWER indicator will begin blinking in orange.
   Then the POWER indicator will stop blinking and light in steady orange when the lamp cooling is complete.
3. Make sure that the POWER indicator lights in steady orange, and set the power switch to the OFF position (marked "O").
   The POWER indicator will go off. Attach the lens cover.

Do not turn the projector on for 10 minutes or more after turning it off. Turning the projector on again too soon could shorten the lifetime of some consumable parts of the projector.

⚠WARNING

►Do not touch around the lamp cover and the exhaust vents during use or just after use, since it is too hot.

Lamp

A lamp has finite product life. Using the lamp for long periods of time could cause the pictures darker or the color tone poor. Note that each lamp has a different lifetime, and some may burst or burn out soon after you start using them.

Preparation of a new lamp and early replacement are recommended. To prepare a new lamp, make contact with your dealer and tell the lamp type number.

Type number = 456-8949H

Replacing the lamp

1. Turn the projector off, and unplug the power cord. Allow the projector to cool for at least 45 minutes.
2. Prepare a new lamp.
   If the projector is mounted on a ceiling, or if the lamp has broken, also ask the dealer to replace the lamp.

In case of replacement by yourself,

3. Loosen the screw (marked by arrow) of the lamp cover and then slide the lamp cover to the side to remove it.
4. Loosen the 3 screws (marked by arrow) of the lamp, and slowly pick up the lamp by the handles.
5. Insert the new lamp, and retighten firmly the 3 screws of the lamp that are loosened in the previous process to lock it in place.
6. Slide the lamp cover back in place and firmly fasten the screw of the lamp cover.
7. Turn the projector on and reset the lamp time using the LAMP TIME item in the OPTION menu.
   (1) Press the MENU button to display a menu.
   (2) Point at the "Go to Advanced Menu …" in the menu using the ▼/▲ button, then press the ► button.
   (3) Point at the "OPTION" in the left column of the menu using the ▼/▲button, then press the ► button.
   (4) Point at the "LAMP TIME" using the ▼/▲ button, then press the ► button. A dialog will appear.
   (5) Press the ▲ button to select "RESET" on the dialog. It performs resetting the lamp time.

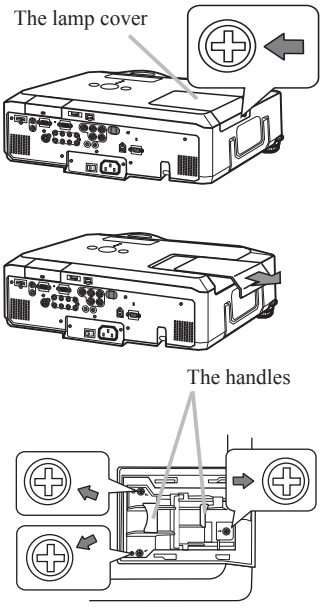

NOTE

• Please reset the lamp time only when you have replaced the lamp, for a suitable indication about the lamp.

Lamp (continued)

Lamp warning

⚠ HIGH VOLTAGE ⚠ HIGH TEMPERATURE ⚠ HIGH PRESSURE

►The projector uses a high-pressure mercury glass lamp. The lamp can break with a loud bang, or burn out, if jolted or scratched, handled while hot, or worn over time. Note that each lamp has a different lifetime, and some may burst or burn out soon after you start using them. In addition, when the bulb bursts, it is possible for shards of glass to fly into the lamp housing, and for gas containing mercury to escape from the projector's vent holes.

Disconnect the plug from the power outlet

- If the lamp should break (it will make a loud bang when it does), Unplug the power cord from the outlet, and make sure to request a replacement lamp from your local dealer. Note that shards of glass could damage the projector's internals, or cause injury during handling, so please do not try to clean the projector or replace the lamp yourself. Ventilate the room well, and make sure not to breathe the gas that comes out of the projector vents, or get it in your eyes or mouth.
- Before replacing the lamp, turn the projector off and unplug the power cord, then wait at least 45 minutes for the lamp to cool sufficiently. Handling the lamp while hot can cause burns, as well as damaging the lamp.

- Never unscrew except the appointed (marked by an arrow) screws.
- Do not open the lamp cover while the projector is suspended from a ceiling. This is dangerous, since if the lamp's bulb has broken, the shards will fall out when the cover is opened. In addition, working in high places is dangerous, so ask your local dealer to have the lamp replaced even if the bulb is not broken.
- Do not use the projector with the lamp cover removed. At the lamp replacing, make sure that the screws are screwed in firmly. Loose screws could result in damage or injury.

- Use only the lamp of the specified type.
- If the lamp breaks soon after the first time it is used, it is possible that there are electrical problems elsewhere besides the lamp. If this happens, consult your local dealer or a service representative.
- Handle with care: jolting or scratching could cause the lamp bulb to burst during use.
- Using the lamp for long periods of time, could cause it dark, not to light up or to burst. When the pictures appear dark, or when the color tone is poor, please replace the lamp as soon as possible. Do not use old (used) lamps; this is a cause of breakage.

► **About disposal of a lamp:** This product contains a mercury lamp; do not put it in a trash. Dispose of it in accordance with environmental laws.
· For lamp recycling, go to www.lamprecycle.org (in the US).
· For product disposal, consult your local government agency or www.eiae.org (in the US) or www.epsc.ca (in Canada).
For more information, ask your dealer.

Air filter

Please check and clean the air filter periodically. When the indicators or a message prompts you to clean the air filter, comply with it as soon as possible. The air filter has two kinds of filters inside. Replace the filters when they are damaged or too soiled. To prepare the new filters, make contact with your dealer and tell the following type number.

Type number = MU05661

When you replace the lamp, please replace the air filter. An air filter of specified type will come together with a replacement lamp for this projector.

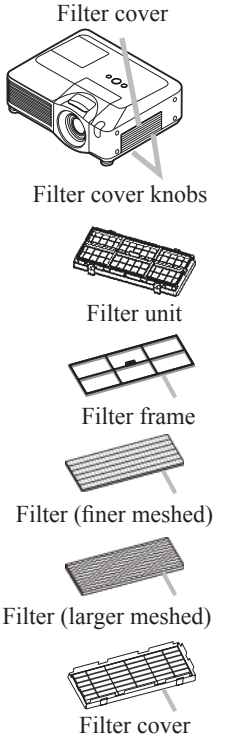

1. Turn the projector off, and unplug the power cord. Allow the projector to sufficiently cool down.
2. Use a vacuum cleaner on and around the filter cover.
3. Pull the filter cover knobs while lifting it, to take the filter unit off.
4. Use a vacuum cleaner for the filter vent of the projector and both sides of the filter unit.

If the filters are damaged or too soiled, replace them according to the following procedure number 5 to 7. Otherwise, please jump to the procedure number 8.

5. Pull the filter frame's knob up while holding the filter cover to remove the filter frame, then take the filters out.
6. Set new filters where former filters were. Put the larger meshed filter into a filter cover first. Then put the finer meshed filter on the larger meshed one.
7. Put the filter frame back where it was.
8. Put the filter unit back into the projector.
9. Turn the projector on and reset the filter time using the FILTER TIME item in the EASY MENU.
   (1) Press the MENU button to display a menu.
   (2) Point at the "FILTER TIME" using the ▼/▲ button, then press the ► button. A dialog will appear.
   (3) Press the ▲ button to select RESET on the dialog. It performs resetting the filter time.

⚠WARNING

►Before taking care of the air filter, make sure the power cable is not plugged in, then allow the projector to cool sufficiently.

►Use only the air filter of the specified type. Do not use the projector without the air filter or the filter cover. It could result in a fire or malfunction to the projector.

►Clean the air filter periodically. If the air filter becomes clogged by dust or the like, internal temperatures rise and could cause a fire, a burn or malfunction to the projector.

NOTE • Please reset the filter time only when you have cleaned or replaced the air filter, for a suitable indication about the air filter.

• The projector may display the message such as "CHECK THE AIR FLOW" or turn off the projector, to prevent the internal heat level rising.

Internal clock battery

Consumption of the battery makes the clock not to work correctly. When the clock is wrong or it has stopped, please replace the battery according to the following procedures.

1. Turn the projector off, and unplug the power cord. Allow the projector to cool sufficiently.
2. After making sure that the projector has cooled adequately, slowly turn over the projector, so that the bottom is facing.
3. Turn the battery cover in the direction indicated "**OPEN**" using such as coins. Then the battery cover will come up. While removing the battery cover, pick its knob.
4. Press the metal claw of the battery holder. Then the battery will come up. Remove the battery.
5. Replace battery with **HITACHI MAXELL, Part No.CR2032** only.
   Put a new battery into battery case. Please make sure that the + is facing upward. Insert the battery case slowly into the battery slot until you hear the snap.
   Note: If the battery is placed in the battery holder upside-down,
   (1) Remove the battery cover and turn the projector so that top faces up.
   (2) While lifting the side of the projector closest to the lens, press the metal claw of the battery holder. The battery will fall out of the holder, so be careful not to lose it.
6. Close the battery cover. Replace the battery cover in place, then turn it in the direction indicated "**CLOSE**" using such as coins, to fix.

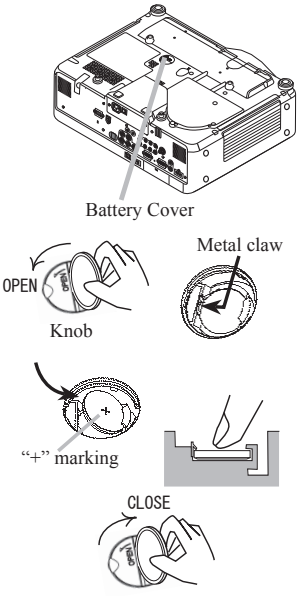

⚠WARNING

►Always handle the batteries with care and use them only as directed. Battery may explode if mistreated. Do not recharge, disassemble or dispose of in fire.
And also improper use may result in cracking or leakage, which could result in fire, injury and/or pollution of the surrounding environment.

- Be sure to use only the batteries specified.
- Make sure the plus and minus terminals are correctly aligned when loading a battery.
- Keep a battery away from children and pets. If swallowed consult a physician immediately for emergency treatment.
- Do not short circuit or solder a battery.
- Do not allow a battery in a fire or water. Keep batteries in a dark, cool and dry place.
- If you observe battery leakage, wipe out the leakage and then replace a battery. If the leakage adheres to your body or clothes, rinse well with water immediately.
- Obey the local laws on disposing the battery.

Using the CD manual

The other manuals for this product are written into the included CD-ROM titled “User’s Manual (detailed)”. Before using the CD-ROM, please read the following to ensure the proper use.

System requirements

The system for using the CD-ROM requires the following.

Windows®:	OS: Microsoft® Windows® 98, Windows® 98SE, Windows NT®4.0, Windows Me®, Windows® 2000/Windows®XP, or later
	CPU: Pentium® processor 133MHz / Memory: 32MB or more
Macintosh®:	OS: Mac OS 10.2 or later
	CPU: PowerPC® / Memory: 32MB or more
CD-ROM drive:	4x CD-ROM drive
Display:	256 color / 640x480 dots resolution
Applications:	Microsoft Internet Explorer4.0 or later

How to use the CD

1. Insert CD into PC’s CD-ROM drive.

Windows®:	In a while, Web browser automatically starts. Start up window comes up.
Macintosh®:	(1) Double-click on the ”Projectors” icon appeared on the desktop screen.
	(2) When “main.html” file is clicked, Web browser will start and Initial window will appear.

2. Click the model name of your projector first, and then click language you want from the displayed list. The user’s manual (detailed) will open.

⚠CAUTION

►Only use the CD-ROM in a computer CD drive. The CD-ROM is designed for PC use only. NEVER INSERT THE CD-ROM INTO A NON-COMPUTER CD PLAYER! Inserting the CD-ROM into an incompatible CD drive may produce a loud noise, which in turn MAY RESULT IN EAR AND SPEAKER DAMAGE!

►After using CD-ROM, please put it into CD case and keep it. Please keep the CD neither in direct sunlight nor in a high temperature and high humidity environment.

NOTE

• The information in the CD-ROM is subject to change without notice.

• No responsibility is taken for any obstacle and defect to hardware and software of your PC as a result of the use of the CD-ROM.

• All or Any part of the information in the CD-ROM must not be copied, reproduced or republished without notice to our company.

Regulatory notices

WARNING:

In the US Declaration of Conformity

Trade name:	HITACHI
Model Number:	CP-X809W
Responsible Party:	Hitachi Home Electronics (America), Inc.
Address:	900 Hitachi way, Chula Vista, CA 91914-3556 U.S.A.
Telephone Number:	+1 –800-225-1741

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.
This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules.

In Canada **NOTICE:** This Class B digital apparatus complies with Canadian ICES-003.

These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interface by one or more of the following measures:
- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

INSTRUCTIONS TO USERS:

In the US This equipment complies with the requirements of FCC (Federal Communication Commission) equipment provided that the following conditions are met.

Some cables have to be used with the core set. Use the accessory cable or a designated-type cable for the connection. For cables that have a core only at one end, connect the core to the projector.
CAUTION: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Information for users applicable in European Union countries

This symbol on the product or on its packaging means that your electrical and electronic equipment should be disposed at the end of life separately from your household wastes. There are separate collection systems for recycling in EU. For more information, please contact the local authority or the dealer where you purchased the product.

Specifications

Item	Specifications
Product name	Liquid crystal projector
Liquid Crystal Panel	1024 horizontal x 768 vertical
Lens	Zoom lens F=1.7 ~ 1.9 f=24 ~ 29 mm (approx.)
Lamp	275W UHB
Audio output	4W x 4
Power supply	AC 100-120V/5.0A, AC220-240V/2.1A
Power consumption	460W
Temperature range	5 ~ 35°C (Operating)
Weight (mass)	7.1kg (approx.)
Ports	RGB1 ..... D-sub 15 pin mini x 1 RGB2 G/Y, B/C_B/P_B, R/C_R/P_R, H, V .....BNC x 5 S-VIDEO .....mini DIN 4 pin x 1 VIDEO .....RCA x 1 Y, C_B/P_B, C_R/P_R (component video) .....RCA x 3 HDMI .....HDMI x 1 AUDIO IN1 ..... Stereo mini x 1 AUDIO IN2 ..... Stereo mini x 1 AUDIO IN3 R/L .....RCA x 2 AUDIO IN4 R/L .....RCA x 2 RGB OUT ..... D-sub 15 pin mini x 1 AUDIO OUT ..... Stereo mini x 1 USB ..... USB (B) x 1 REMOTE CONTROL ..... Stereo mini x 1 CONTROL .....D-sub 9 pin x 1 LAN .....RJ45 x 1 AUX I/O ..... USB (A) x 1 SD CARD .....SD card slot x 1
Size	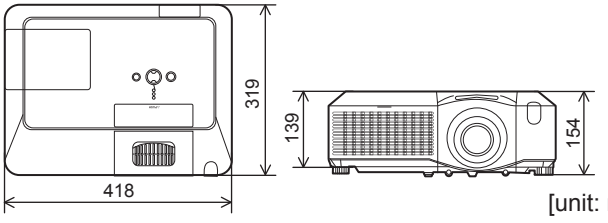 [unit: mm]
Optional parts	**Lamp:** 456-8949H **Air filter:** MU05661 **Wireless network card:** VA0833x* * For more information, please consult your dealer.

Warranty and after-service

If an abnormal operation (such as smoke, strange odor or excessive sound) should occur, stop using the projector immediately. Otherwise if a problem occurs with the projector, first refer to the "Troubleshooting" of the "Operating Guide" in the CD and run through the suggested checks. If this does not resolve the problem, please consult your dealer or service company. They will tell you what warranty condition is applied.

Please check the following web address where you may find the latest information for this projector.

http://www.dukcorp.com/audiovisual
or
Dukane Service Dept: 1.888.676.2487

NOTE

- The information in this manual is subject to change without notice.
- The manufacture assumes no responsibility for any errors that may appear in this manual.
- The reproduction, transfer or copy of all or any part of this document is not permitted without express written consent.

TRADEMARK ACKNOWLEDGMENT

- Microsoft and Internet Explorer Windows, Windows NT, Windows Me, Windows Vista are registered trademark of Microsoft Corporation.
- PowerPC is a registered trademark of International Business Machines Corporation.
- VESA and DDC are trademarks of the Video Electronics Standard Association.
- Apple and Macintosh, Mac, Mac OS are registered trademarks of Apple Inc.
- Pentium is a registered trademark of Intel Corporation.
- JavaScript is a registered trademark of Sun Microsystems, Inc.
- DVI is a trademark of Digital Display Working Group.
- HDMI, the HDMI logo and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing LLC.
- SRS WOW is a trademark of SRS Labs, Inc. WOW technology is incorporated under license from SRS Labs, Inc.

All other trademarks are the properties of their respective owners.